


*Your proven answer
to soundproof ventilation
in noise affected buildings.*



100 Diameter Weather Louvre with Stainless Steel Dome

Product Code: 23-01-SS

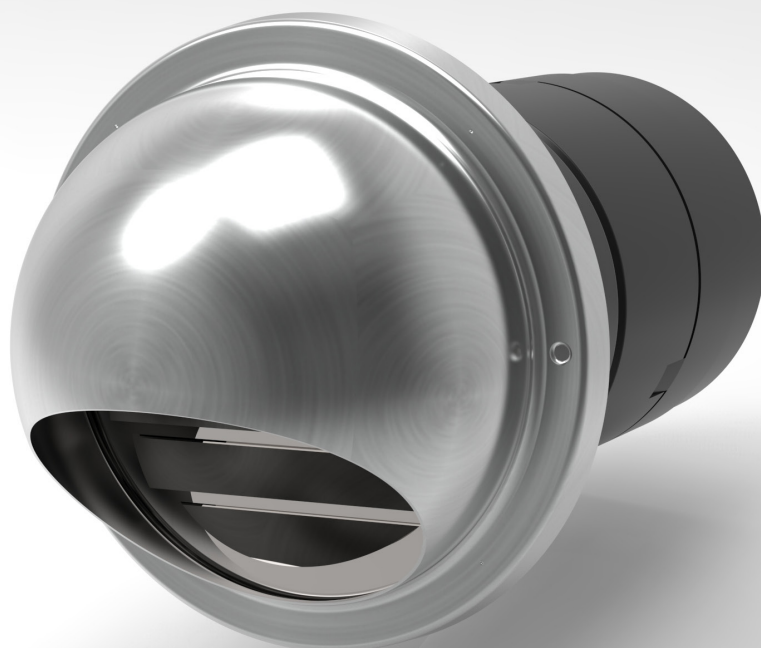

Best new product
DesignBuild Australasia



Top 10 Eco Product in the USA
Sustainable Building Magazines



Silver Medal
International Salon des Inventions.
Geneve, Switzerland

Information

The Silenceair 100 diameter weather louvre with stainless steel dome cover is designed to be installed in external wall systems where a 100mm diameter penetration is preferred.

This weather louvre offers a complete weather seal between the Silenceair acoustic unit and the weather louvre. The joints can be sealed with standard plumbers adhesive. The system is suitable for exposed positions. Any wind driven rain that may enter the system will simply drain out through the louvre.

The weather louvre comprises an exterior louvre cover, an integral insect screen, an extension tube, and an internal louvre spray guard. The exterior cover can be painted to match the building colour scheme.


The length of the extension tube can be cut to suit the thickness of the wall.

Note. When ordering this weather louvre, ensure you order the Silenceair 140mm acoustic ventilator with round adaptor (Code 11-02-01).


Product Code

23-01-SS: Stainless Steel


Open Vent Area 5,200mm²
Weight 0.252 kg
Material Recyclable ABS




TOP VIEW




FRONT VIEW



SIDE VIEW


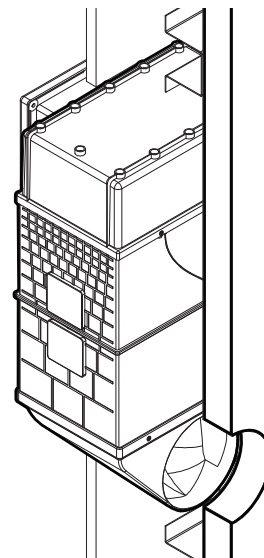


Fit the Silenceair unit into place and mark the location of the exterior penetration on the wall.

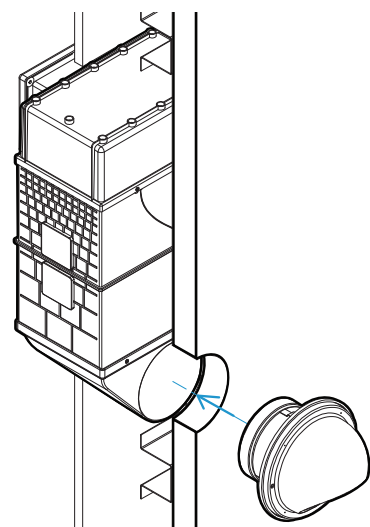

Drill out the hole and insert the assembled weather louvre unit. Ensure extension tube has been cut to the correct length to allow a tight fit.

Section View

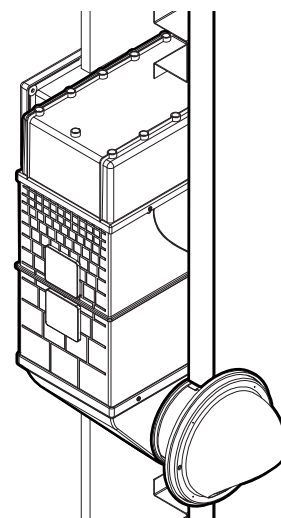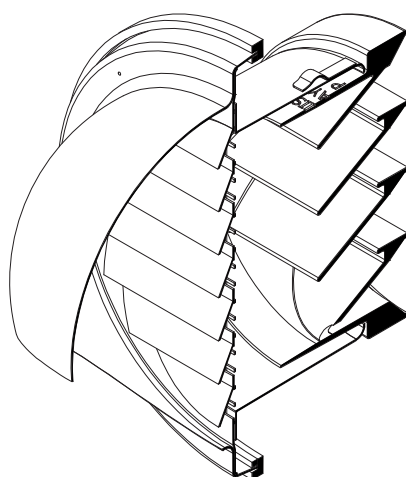

Fix into place.

For more information please contact


www.silenceair.com enquiries@silenceair.com +61 2 9555 7215

Patents and Patents Pending Silenceair is a registered trademark of Silenceair International Pty Limited


Information

The Silenceair 100 diameter weather louvre with stainless steel dome cover is designed to be installed in external wall systems where a 100mm diameter penetration is preferred.


This version shows a 50mm extension.

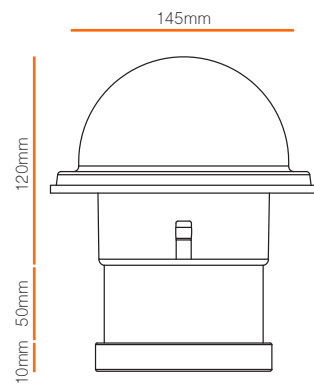

TOP VIEW




FRONT VIEW




SIDE VIEW

Open Vent Area 5,200mm²
Weight 0.323kg
Material Recyclable ABS


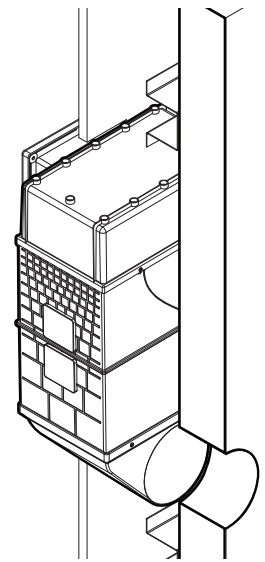


Fit the Silenceair unit into place and mark the location of the exterior penetration on the wall.

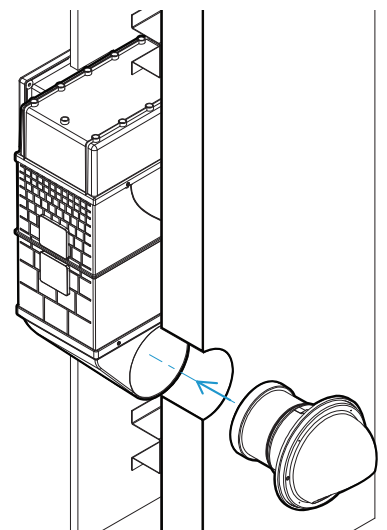

Drill out the hole and insert the assembled weather louvre unit. Ensure extension tube has been cut to the correct length to allow a tight fit.

Section View

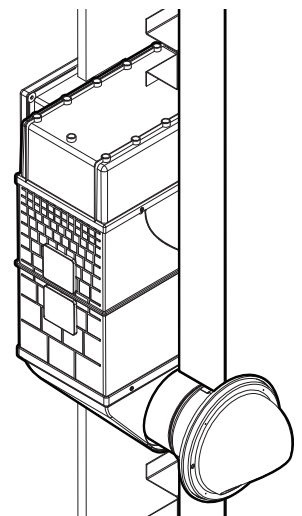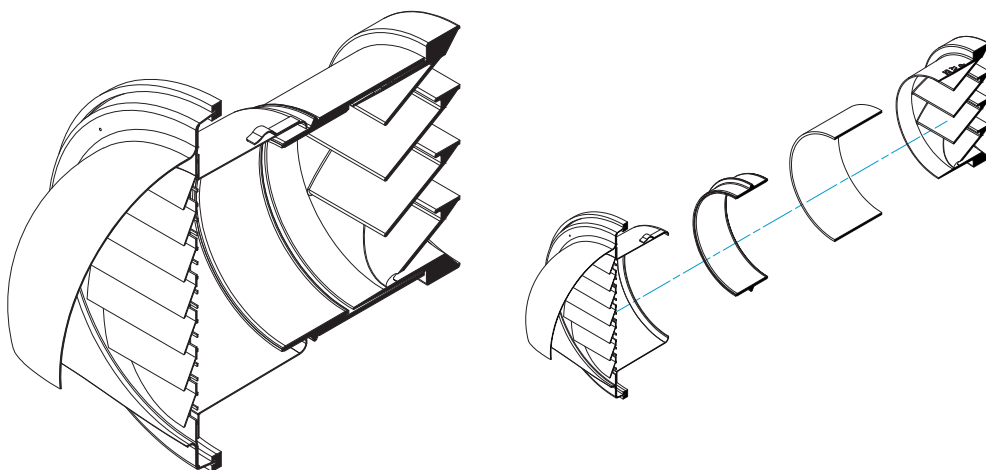

Fix into place.

For more information please contact


www.silenceair.com enquiries@silenceair.com +61 2 9555 7215

Patents and Patents Pending Silenceair is a registered trademark of Silenceair International Pty Limited


Information

The Silenceair 100 diameter weather louvre with stainless steel dome cover is designed to be installed in external wall systems where a 100mm diameter penetration is preferred.


This versions shows a 200mm extension.

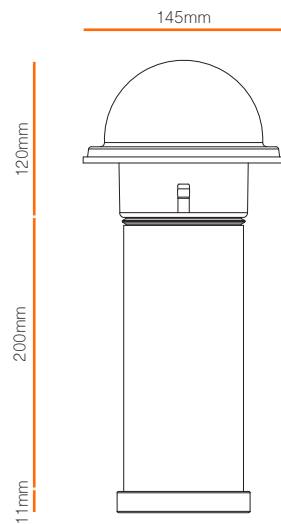

TOP VIEW



FRONT VIEW

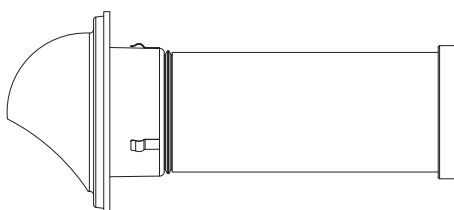


SIDE VIEW


Open Vent Area 5,200mm²

Weight 0.425 kg

Material Recyclable ABS


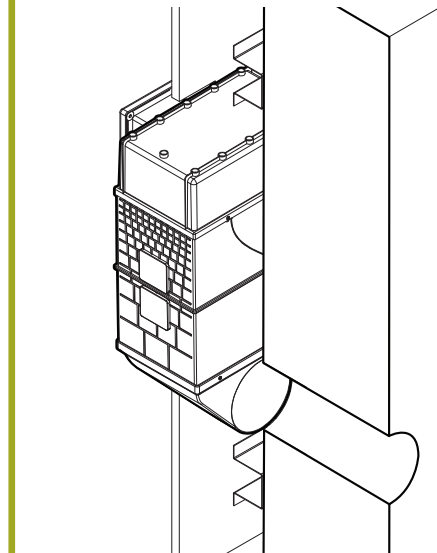


Fit the Silenceair unit into place and mark the location of the exterior penetration on the wall.

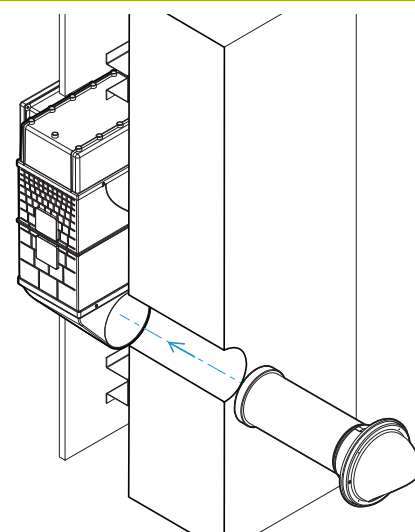

Drill out the hole and insert the assembled weather louvre unit. Ensure extension tube has been cut to the correct length to allow a tight fit.

Section View

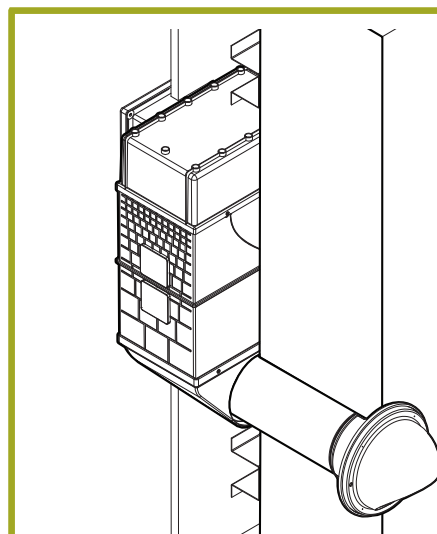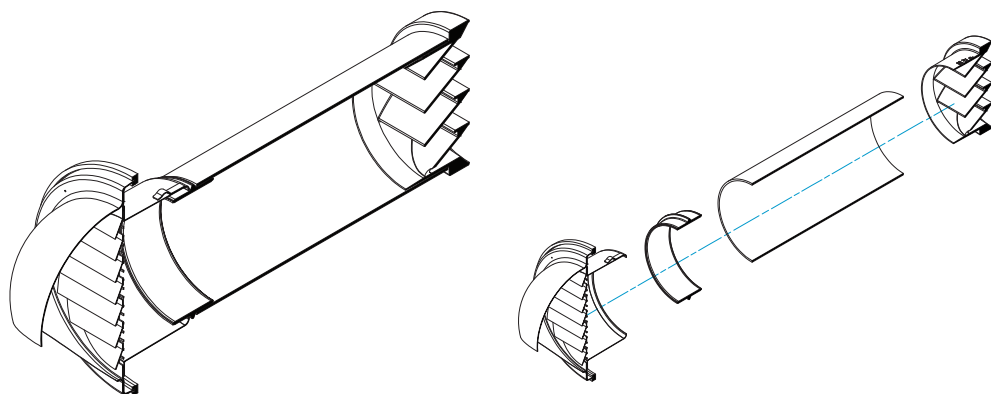

Fix into place.

For more information please contact

www.silenceair.com enquiries@silenceair.com +61 2 9555 7215

Patents and Patents Pending Silenceair is a registered trademark of Silenceair International Pty Limited